

# neoECU AVB/TSN

## AVB/TSN Endpoint Simulation (Talker/Listener)



Intrepid's latest addition to the neoECU series integrates 100BASE-T1 and Gigabit Ethernet with a wide variety of multimedia interfaces to deliver a fully configurable AVB Endpoint.

### Applications:

- **Rapid Prototyping**  
Quickly assemble prototype AVB systems to characterize performance and evaluate trade-offs well in advance of production prototypes.
- **Accelerate System Level Troubleshooting**  
Use as a "Known-Good" sample to replace suspect ECUs to aid in the process of elimination.
- **Robustness Testing**  
Observe your system under stress by quickly configuring additional endpoints to simulate high levels of network utilization.

### AVB/TSN Standards Compliance

- 802.1Qat Stream Reservation Protocol (SRP)
- 802.1Qav Forwarding and Queuing for Time-Sensitive Streams (FQTSS)
- 802.1AS Precision Timing Protocol
- IEEE 1722 (AVTP)
- IEEE 1722.1 (AVDECC)


### Scripting & Automation

This device is also well-equipped to integrate into a vehicle or test bench with a full featured scripting engine controlling 2 CAN FD channels and 4 programmable GPIO channels.

**Function Blocks** enable users to easily set up automated tasks and simulate nodes and ECUs without relying on a complicated, text-based computer language.

**The C Code Interface** guides you through building a C Project in Microsoft Visual C. This interface allows you access to anything accessible through Visual C. Imagine being able to access security DLL files, external hardware, or the Win32API and interface that information with your networks. The possibilities are endless!

Rev.07172017

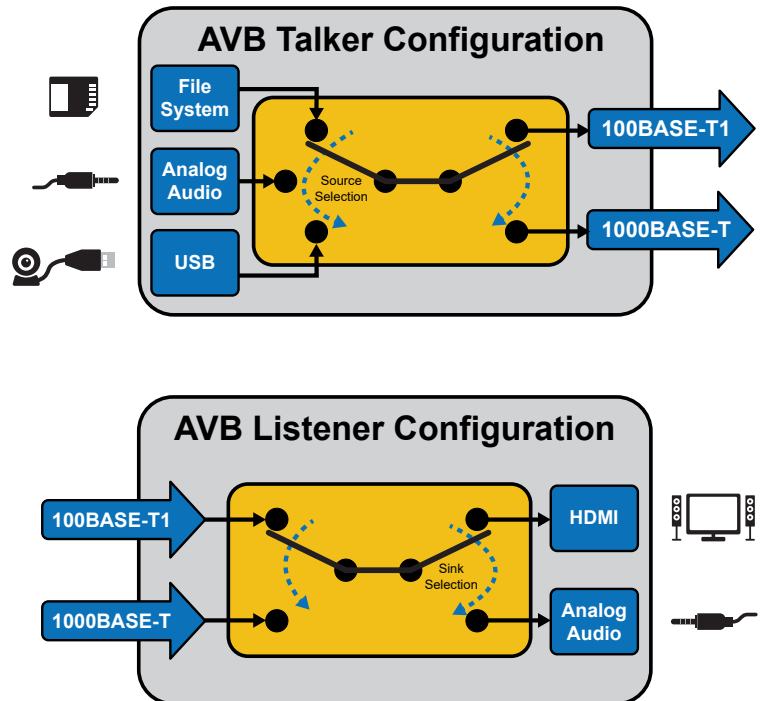

Intrepid Control Systems, Inc.

31601 Research Park Drive, Madison Heights, MI 48071 USA

(ph) +1-586-731-7950 (fax) +1-586-731-2274

www.intrepidcs.com

automotive engineering  
tool alliance  
www.eta-rice.com

# neoECU AVB/TSN

## Features:

- Standalone script execution with message RX/TX, expression evaluation, conditional logic, and GPIO control
- 4x Programmable GPIO channels (digital in/out, analog in)
- 8x Dual purpose LEDs for network status and device configuration
- Programmable DW CAN termination circuits
- Battery-backed real time clock (RTC)
- Field-upgradeable flash firmware
- Rugged aluminum case with shock-absorbing end caps

## Supported Media Formats:

- Video: IEC 61883-6 (h264, 720p@30fps)
- Audio: IEC 61883-4 / AAF
- Firmware upgradeable to support additional formats


## 26 Pin Connector

Pin	Description	Pin	Description
1	NC	14	HSCAN1_P
2	NC	15	NC
3	NC	16	HSCAN2_P
4	HSCAN1_N	17	NC
5	NC	18	LSFTCAN_P
6	HSCAN2_N	19	V BATT
7	NC	20	NC
8	LSFTCAN_N	21	NC
9	NC	22	EMISC_IO1
10	GND	23	EMISC_IO2
11	NC	24	EMISC_IO3
12	NC	25	EMISC_IO4
13	NC	26	SWCAN

## Ordering Information:

Part Number	Description
NEOECU-AVB-TSN	neoECU AVB/TSN device

\*Specifications subject to change. Please contact Intrepid for the latest information.

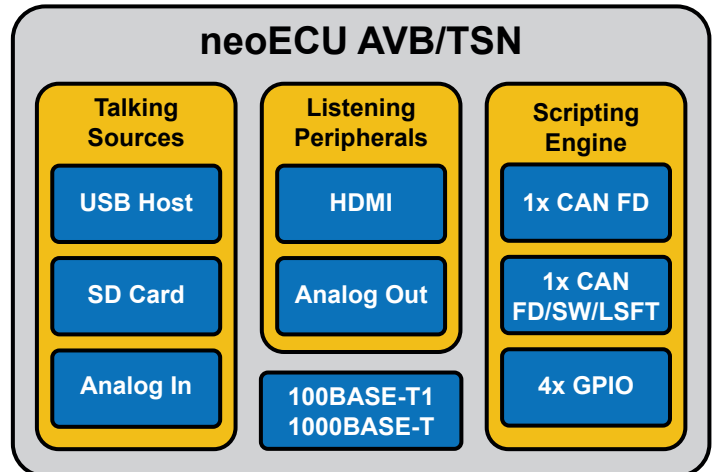

## Device Specifications

- Power supply: 4.5V - 40V operation
- Temperature range: -40°C to 85°C
- One-year limited warranty
- Fully-isolated USB with Microsoft-certified USB drivers
- Dimensions: 1.56" x 4.42" x 7.34" (3.98 cm x 11.22 cm x 18.65 cm)
- Weight: 1.31 lb (0.595 kg)

## Network Specifications

- Ethernet configurations (mutually exclusive)
  - 100BASE-T1 endpoint (2-wire)
  - 1000BASE-T endpoint: (8-wire, limited to 480 Mbps)
- CAN (2 channels)
  - 1x CAN FD
  - 1x CAN FD/SW/LSFT

## Supported Interfaces

- 1x HDMI output
- 2x Analog audio in (mini jack)
- 8x Analog audio out (mini jack)
- USB device (PC interface)
- USB host (camera)
- SD card slot

Rev.07172017



**Intrepid Control Systems, Inc.**

31601 Research Park Drive, Madison Heights, MI 48071 USA

(ph) +1-586-731-7950 (fax) +1-586-731-2274

[www.intrepidcs.com](http://www.intrepidcs.com)